

Promote
yourself.



DYNAMIC PROJECTION
INSTITUTE



Mirror Head 11


Digital Projection E-Vision Laser 11000 4K-UHD

Item Number: MH11-L

The Mirror Head is a modern high-tech mirror that is digitally operated and is used as an add-on feature for projectors. It can be set to move either rapidly or slowly to project pictures, videos and texts onto any imaginable surface.


Through its high level of performance, the entire system guarantees highly accurate positioning. It is important to note that the Mirror Head is also extendable to almost every projector and a quality product made in Austria.

Static projection belongs to the past. The journey into a new visual experience begins here. Our technology paves the way to unprecedented possibilities in lighting, projection and interior design.

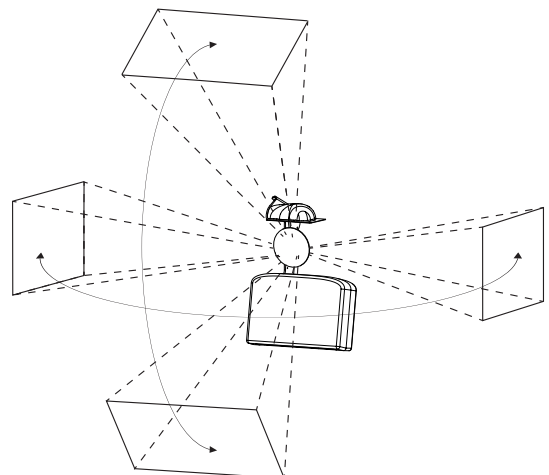



Mirror Head 11 - Digital Projection E-Vision Laser 11000 4K-UHD

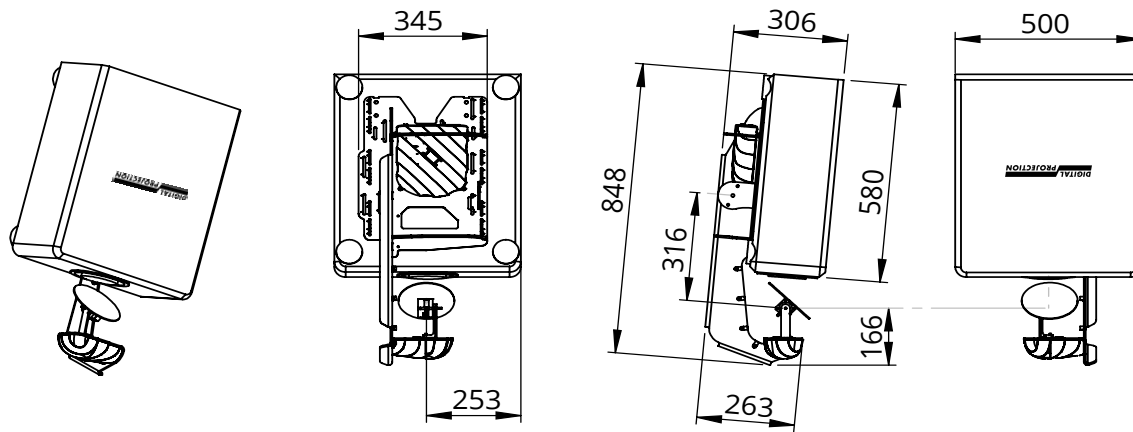

MECHANICAL SPECIFICATIONS

Fixture dimensions (W/D/H):	500mm x 848 x 306 mm
Fixture total weight:	39,5 kg
Projector weight:	28 kg
Mirror Head unit only:	11,5 kg

For more information on the Mirror Head and accessories:
<https://www.dynamicprojection.com/mh-support/>

ELECTRICAL SPECIFICATIONS

Input Power:	100-240V / 2-1A / 50-60Hz, Max. 10A (3-prong C14 male socket)
Output Power:	AC loop trough for projector (3-prong C13 female socket)



Caution! There are no user serviceable parts (fuse) inside this unit.

PROJECTOR COMPATIBILITY

E-Vision Laser 7500	WUXGA (1920 x 1200)	7,500 Lumens
E-Vision Laser 8500	WUXGA (1920 x 1200)	8,500 Lumens
E-Vision Laser 9100	WUXGA (1920 x 1200)	8,600 Lumens
E-Vision Laser 10K	WUXGA (1920 x 1200)	11,250 Lumens
E-Vision Laser 11000 4K-UHD	4K (3840 x 2160)	10,500 Lumens
E-Vision Laser 13000	WUXGA (1920 x 1200)	13,500 Lumens
E-Vision Laser 15000	WUXGA (1920 x 1200)	15,000 Lumens
E-Vision Laser 4K-UHD	4K (3840 x 2160)	7,500 Lumens

Due to optical reasons we recommend a throw ratio over 1.6:1.

IMPORTANT NOTE: For information about the specifications, operations and use of the projector please read the instruction manual of the projector. <https://www.digitalprojection.com/emea/dp-projectors/e-vision-laser-11000-4k-uhd/>

OPERATION SPECIFICATIONS / FEATURES

- DMX-512 control over 14 DMX channels
- DMX IN / OUT port (5-pin male and female XLR connectors)
- Art-Net™ connection (RJ45) (Art-Net™ designed by and Copyright Artistic Licence Holdings Ltd.)
- Mirror Tilt modes: 90° & 162°
- Mirror Pan mode: 180°
- High resolution micro step motors with maintenance free direct drive
- Self calibrating mirror position for high accuracy
- Absolut reposition accuracy <0,03°
- Movement accuracy: Pan and Tilt from the same direction to the programmed point within approximately 0,01°
- RS232 remote control connection for projector
- (D-sub 9 male) - cable included
- Flashable firmware (Mini USB)
- High resolution LED-Display for easy configuration
- LED-Display backlight auto turn off for energy saving
- LED-Display Flip / Flop mode for easy reading in difficult positions
- Coated mirror for optimum reflection ~98% refraction factor
- Optimized mirror optics for the specific projector
- Ambient Light LED with high power 3 Colour LEDs (18 Watt total)
- High durability black powder-coating surface finishing
- Mounting plate optimized for specific projector mounting
- Easy to adjust mounting system
- Heavy-use truss or wall mounting supports
- Passive cooled system (excluding projector)
- Environmental tolerances: Ambient operating temperature range: 0°–45°C, Humidity: 20%–80% (non-condensing)
- Package includes: RS232 cable, AC-loop through cable, Quick installation guide



To protect the environment,
please try to recycle the packing
material as much as possible.

